

# Large Area Scan Series


## AX7C10CK250E



### Features

- Sony CMOS sensor, global shutter, APS-C image size;
- Patented flatness adjustment scheme to prevent partial defocusing;
- Excellent heat dissipation design, precise temperature control and constant temperature maintenance;
- Support Software Trigger/Hardware Trigger/Free Run Model, support trigger via CameraLink acquisition board;
- Support user-defined ROI, horizontal mirror and vertical mirror;
- Support ISP functions including Auto Exposure/Auto Gain/Gamma Correction/LUT etc.;
- Mono cameras support contrast adjustment;
- Support for FFC function to provide more uniform picture quality;
- Support mutil-frame average function, up to 16 frames averaging;
- Support fan speed adaptive function for setting the target temperature of the sensor;

### Dimensions (mm)

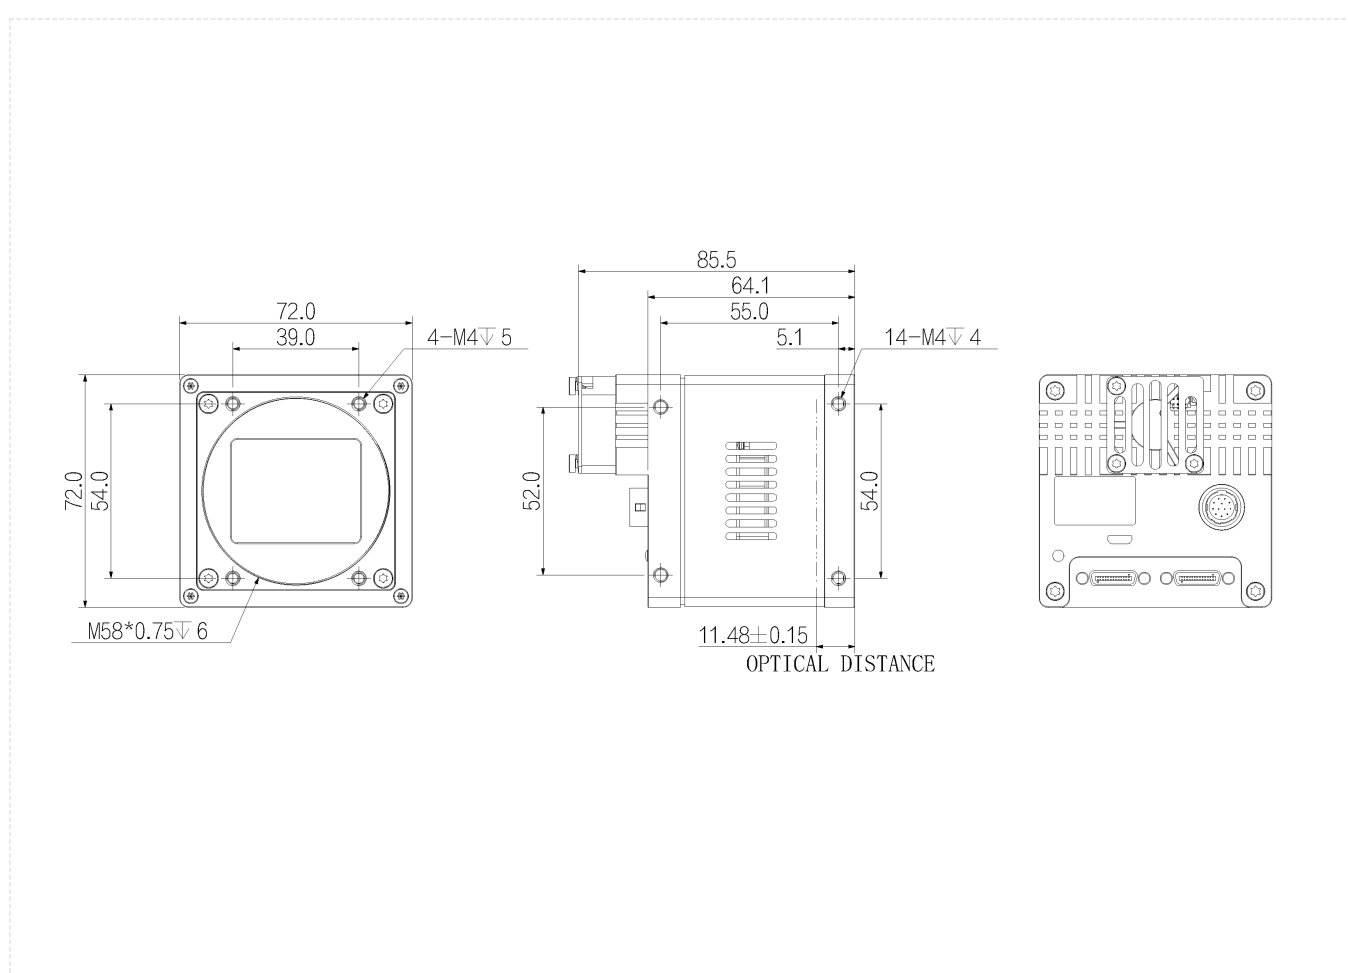

Specification

Model		AX7C10CK250E
Basic	Sensor	IMX342
	Image Sensor	22.3 mm x 16.7 mm CMOS
	Shutter	Global
	Resolution	6240 × 4848
	Frame Rate	24.8 fps
	Bit Depth	10 bit
	Mono/Color	Color
	Pixel Size	3.45 μm × 3.45 μm
Image	Pixel	31 MP
	S/N Ratio	40 dB
	WDR	73 dB
	Image Format	BayerRG8/10/12, BayerGB8/10/12
	ROI	Support
	X Flip	Support
	Y Flip	Support
	Gain	1 ~ 32
	White Balance	Support
	Gamma	0 ~ 4 , Support LUT
	Exposure Time	3 μs ~ 15 s
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode
	SPC	Support
Performance	User Setting	Support two sets of user-defined configurations
Port	Port	CameraLink
	GPIO Interface	3x Opto-isolated input, 3x Opto-isolated output;1x RS232
	Lens Mount	M58 x 0.75
Power	Power Supply	DC 24V power supply via 12 Hirose interface
	Power Consumption	24 V ≈ 16.8 W
Structure	Product Dimensions	72 mm x 72 mm x 64.1 mm (Non including rear case connector)
	Net Weight	500 g
Environment	Storage Temperature	-30℃ ~ 80℃
	Operating Temperature	-30℃ ~ 50℃

Connector Pin-out



Pin	Signal	Description
1	GND	Power and signal GND
2	Power	Power supply
3	RXD RS232	Serial receive
4	TXD RS232	Serial send
5	Line3	Opto-isolated input
6	Line4	Opto-isolated input
7	Line5	Opto-isolated input
8	OPT_IN_GND	Opto-isolated input GND
9	Line0	Opto-isolated output
10	Line1	Opto-isolated output
11	Line2	Opto-isolated output
12	OPT_OUT_GND	Opto-isolated output GND

Spectrogram

