

# A Series


## A7900CG400E



### Features

- Gigabit Ethernet interface, providing 1Gbps bandwidth with a maximum transmission distance of 100m;
- 128MB on-board cache for data transmission or image resend;
- Support Software Trigger/Hardware Trigger/Free Run Mode;
- Support ISP functions including Sharpness/Denoising/Gamma/LUT/BlackLevel Correction/TargetBrightness/Contrast etc.;
- Color cameras support interpolation, white balance, color conversion matrix, chroma, saturation, etc.;
- Support multiple image data formats output/ROI/Mirror, etc.;
- Conform to GigE Vision V2.0 protocol and GenICam standard;
- Support PoE power supply, DC 6V~26V wide voltage power supply;
- Conform to CE, FCC, UL, RoHS;

### Dimensions (mm)

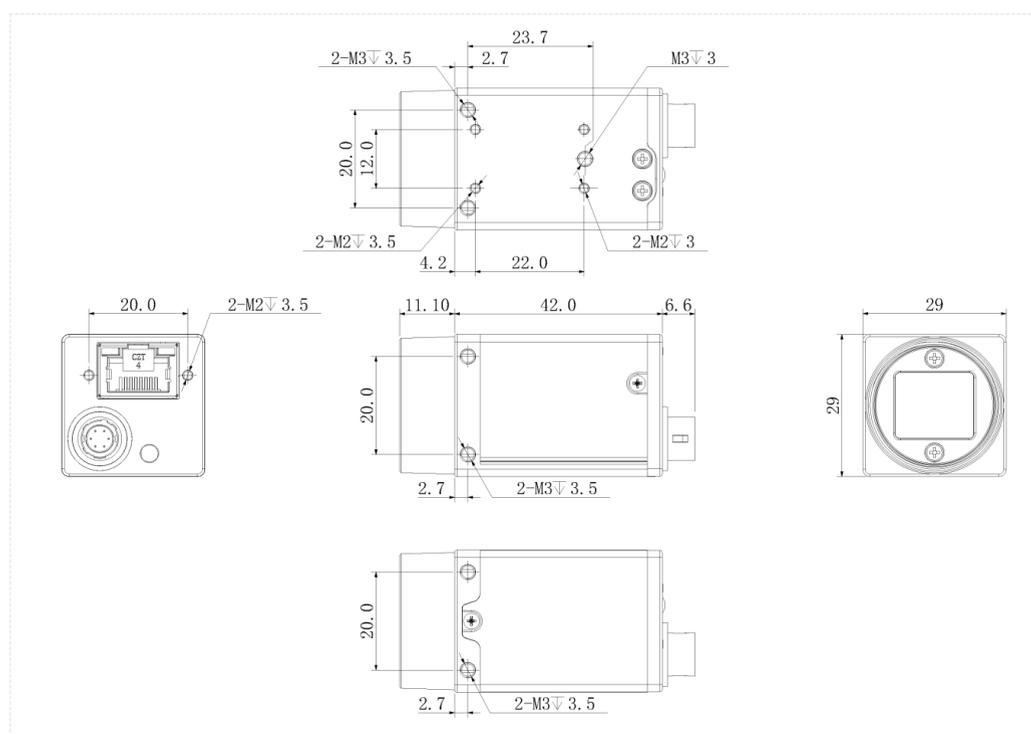

## Specification

	Model	A7900CG400E
Basic	Sensor	IMX267
	Image Sensor	1"CMOS
	Shutter	Global
	Resolution	4096 × 2160
	Frame Rate	13 fps
	Bit Depth	12
	Mono/Color	Color
	Pixel Size	3.45 μm × 3.45 μm
Image	Pixel	8MP
	S/N Ratio	>38dB
	WDR	>70dB
	Image Format	Mono8,BayerRG8/10/10Packed,BayerGB8/10/10Packed , YUV422Packed
	ROI	Support
	X Flip	Support
	Y Flip	Support
	Gain	1~32
	White Balance	Automatic white balance
	Gamma	From 0 to 4, support LUT
	Exposure Time	48μS~1S
	Trigger Mode	Software Trigger/Hardware Trigger/Free Run Mode
	SPC	Support
Performance	User Setting	Support two sets of user-defined configurations
	Image Buffer	128MB
Port	Port	GigE,PoE
	GPIO Interface	1x 6 pin Hirose: 1x Opto-isolated input, 1x Opto-isolated output, 1 configurable input and output
	Lens Mount	C-mount
Power	Power Supply	PoE Power Supply/ DC 6V~26V power supply via Hirose interface
	Power Consumption	12V≈3.2W
Structure	Product Dimensions	29mm*29mm*42mm (not including lens mount and rear case connector)
	Net Weight	100 g
Environment	Storage Temperature	- 30°C~+80°C
	Operating Temperature	- 30°C~+50°C